

K-No.: 26621

### 300mA Differential Current Sensor for 5V Supply Voltage

For the electronic measurement of current:  
DC, AC, pulsed ..., with galvanic isolation between the primary and the secondary circuit



Date: 28.06.2021

Customer: Standard type

Customers Part no:

Page 1 of 4

#### Description

- Closed loop (compensation) Current Sensor with magnetic probe
- Printed circuit board mounting
- Casing and materials UL-listed

#### Characteristics

- excellent accuracy
- very low offset current
- very low temperature dependency and offset drift
- very low hysteresis of offset current
- short response time
- wide frequency bandwidth
- compact design
- reduced offset ripple

#### Applications

Mainly used for stationary operation in industrial applications:

- Solar inverter

#### Electrical data - Ratings

|                            |   |  |   |
|----------------------------|---|--|---|
| $I_{PN}$                   | Primary nominal RMS current                               | 50   | A |
| $I_{\Delta N}$             | Differential rated RMS current                            | 0.3  | A |
| $V_{OUT}$                  | Output voltage @ $I_{\Delta P}$                           | $V_{REF} \pm (0.74 * I_{\Delta P} / I_{\Delta N})$ | V |
| $V_{OUT(0)}^1$             | Output voltage @ $I_P=0A, \vartheta_A=25^\circ C$         | $V_{REF} \pm 0.025$                                | V |
| $V_{OUT(Error)}$           | in case of error (current sensor) $V_{OUT} < 0.5V$ is set | $< 0.5$  | V |
| $V_{REF}$                  | internal reference voltage                                | $2.5 \pm 0.005$                                    | V |
|                            | external reference voltage range                          | 1.4 ... 3.5  | V |
| $V_{REF(test\ current)}^2$ | Reference voltage (external)                              | 0 ... 0.1  | V |
| $V_{OUT(test\ current)}^2$ | Output voltage @ $V_{REF} = 0 \dots 0.1V$                 | $V_{OUT(0)} + 0.25 \pm 0.06$                       | V |
| $K_N$                      | Transformation ratio                                      | 1:1 : 20 : 1000                                    |   |

<sup>1</sup> with switching on and after "test current" the sensor is degaussed by an internal AC-current for about 110ms. In this time the output is set to  $V_{OUT} < 0.5V$ .

<sup>2</sup> If  $V_{REF}$  is set external to 0...0.1V an internal test current is generated.

#### Accuracy – Dynamic performance data

|                         |  | min.       | typ. | max.      | Unit    |
|-------------------------|--|------------|------|-----------|---------|
| $I_{\Delta P,max}$      | Max. measuring range (differential current)            | $\pm 0.85$ |      |           | A       |
| X                       | Accuracy @ $I_{\Delta N}, \vartheta_A = 25^\circ C$    |            |      | $\pm 1.5$ | %       |
| $\epsilon_L$            | Linearity  |            |      | $\pm 1$   | %       |
| $V_O (V_{OUT}-V_{REF})$ | Offset voltage @ $I_P = 0A, \vartheta_A = 25^\circ C$  |            |      | $\pm 25$  | mV      |
| $\Delta V_O / \Delta T$ | Temperature drift of $V_{OUT}$ @ $I_P=0A, \vartheta_A$ |            | 0.1  |           | mV/°C   |
| $t_r$                   | Response time @ 90% of $I_{\Delta N}$                  |            | 35   |           | $\mu s$ |
| $f_{BW}$                | Frequency bandwidth                                    | DC...8     |      |           | kHz     |

#### General data

|               |   |      |    |      |    |
|---------------|---|------|----|------|----|
| $\vartheta_A$ | Ambient operation temperature               | -40  |    | 85   | °C |
| $\vartheta_S$ | Ambient storage temperature (acc. to M3101) | -40  |    | 85   | °C |
| m             | Mass  |      | 60 |      | g  |
| $V_C$         | Supply voltage                              | 4.75 | 5  | 5.25 | V  |
| $I_C$         | Supply current at $I_P = 0A$ and RT         |      | 15 |      | mA |

|                          |  |      |  |      |            |
|--------------------------|--|------|--|------|------------|
| <sup>1</sup> $S_{clear}$ | Clearance (component without solder pad)                             | 8.5  |  |      | mm         |
| <sup>1</sup> $S_{creep}$ | Creepage (component without solder pad)                              | 10.0 |  |      | mm         |
| <sup>1</sup> $U_{sys}$   | System voltage *determines impulse voltage acc. table 7              |      |  | 600  | $V_{RMS}$  |
| <sup>1</sup> $U_{AC}$    | Working voltage *acc. table 10                                       |      |  | 1000 | $V_{RMS}$  |
| <sup>1</sup> $U_{PD}$    | Rated discharge voltage *acc. table 24 with $U_{PD}=U_{AC}*\sqrt{2}$ |      |  | 1414 | $V_{PEAK}$ |

<sup>1</sup>Constructed and manufactured and tested in accordance with IEC 61800-5-1:2007 Reinforced Insulation, Pollution degree 2, Overvoltage category III, Insulation material group I

| Date       | Name | Issue | Amendment   |
|------------|------|-------|---|
| 28.06.2021 | DJ   | 81    | Further standards: UL 508, file E317483, category NMTR2 / NMTR8. And add UL sign to mechanical dimension and marking info box in datasheet. CN-21-221 |

|                           |                     |                    |                     |
|---------------------------|---------------------|--------------------|---------------------|
| Hrg.: R&D-PD NPI D editor | Bearb.: DJ designer | MC-PM: NSch. check | freig.: SB released |
|---------------------------|---------------------|--------------------|---------------------|

K-No.: 26621

### 300mA Differential Current Sensor for 5V Supply Voltage

For the electronic measurement of current:  
DC, AC, pulsed ..., with galvanic isolation between the primary and the secondary circuit



Date: 28.06.2021

Customer: Standard type

Customers Part no:

Page 2 of 4

#### Mechanical outline (mm):




General tolerances DIN ISO 2768-c

Connections:

Pin 5-10: 0.7mm x 0.7mm  
Pin 1-4: Ø2.8mm

Marking:

UL-sign  
4646-X921  
F DC

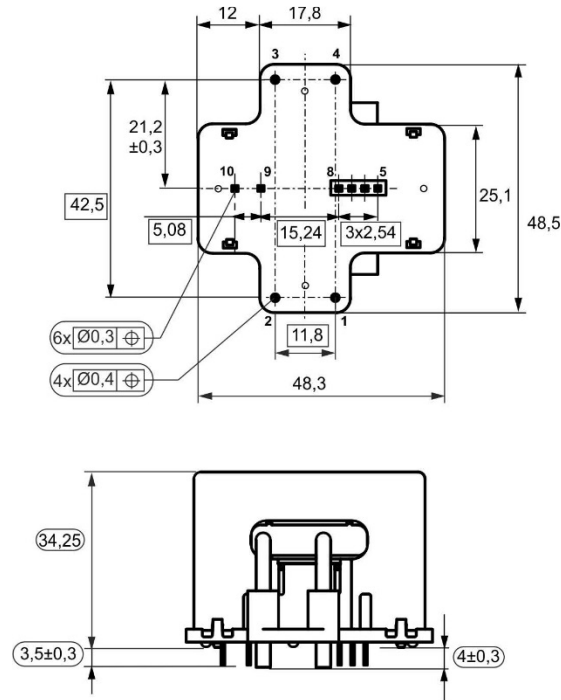


Beschriftung (marking)

○ = Prüfmaß (test dimension)

DC = Date Code  
F = Factory

#### Schematic diagram:

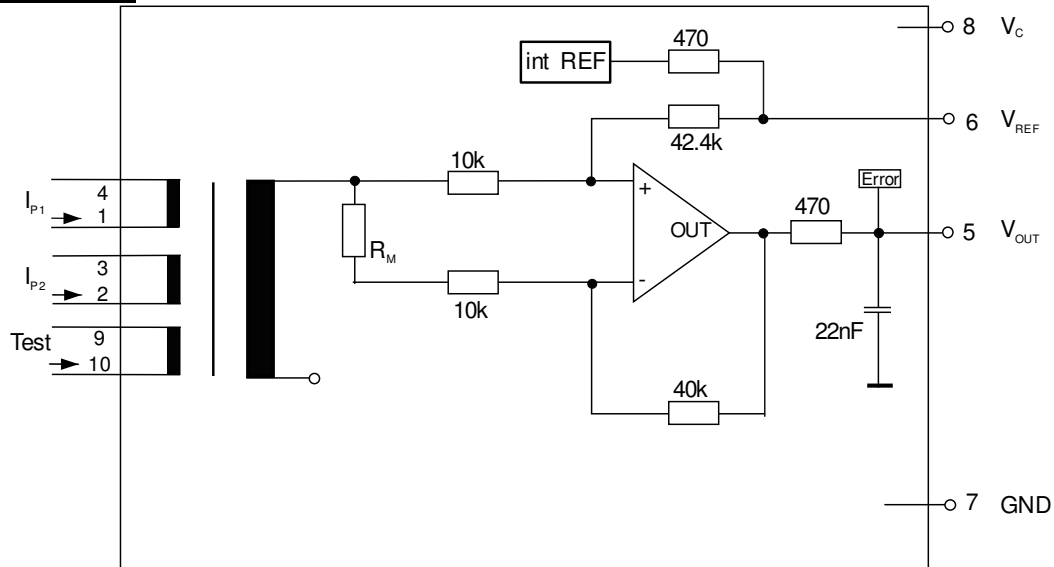

K-No.: 26621

### 300mA Differential Current Sensor for 5V Supply Voltage

For the electronic measurement of current:  
DC, AC, pulsed ..., with galvanic isolation between the primary and the secondary circuit



Date: 28.06.2021

Customer: Standard type

Customers Part no:

Page 3 of 4

| <b>Electrical data:</b> (investigate by a type checking) |  | min.  | typ.        | max. | Unit       |
|--|--|---|-------------|------|------------|
| $V_{C,max}$  | maximum supply voltage (without function)  |   |             | 6    | V          |
| $I_C$  | Supply current with primary current  | $15mA + I_{\Delta P} \cdot K_N + V_{OUT}/R_L$ |             |      | mA         |
| $I_{OUT,SC}$   | Short circuit output current   |   | $\pm 10$    |      | mA         |
| $R_S$  | Secondary coil resistance @ $\theta_A = 85^\circ C$                                    |   |             | 80   | $\Omega$   |
| $R_{Test}$   | Test winding resistance @ $\theta_A = 25^\circ C$                                      |   | 0.9         |      | $\Omega$   |
| $R_{P1,P2}$  | Primary wire resistance @ $\theta_A = 25^\circ C$                                      |   | <b>0.24</b> |      | m $\Omega$ |
| $R_{i,REF}$  | Internal resistance of reference input   |   | 470         |      | $\Omega$   |
| $R_{i,OUT}$  | Output resistance of $V_{OUT}$   |   | 470         |      | $\Omega$   |
| $\Delta X_\theta / \Delta \theta$                        | Temperature drift of X @ $\vartheta_A = -40^\circ C \dots 85^\circ C$                  |   |             | 400  | ppm/K      |
| $\Delta V_{REF} / \Delta \theta$                         | Temperature drift of $V_{REF}$ @ $\vartheta_A = -40^\circ C \dots 85^\circ C$          |   | 5           | 50   | ppm/K      |
| $\Delta V_{O=}$<br>$\Delta(V_{OUT} - V_{REF})$           | Sum of any offset drift including:   |   |             | 32   | mV         |
| $V_{Ot}$   | Long term drift of $V_O$   |   | 12          |      | mV         |
| $V_{OT}$   | Temperature drift of $V_O$ @ $\vartheta_A = -40^\circ C \dots 85^\circ C$              |   | 10          |      | mV         |
| $\Delta V_O / \Delta V_C$                                | Supply voltage rejection ratio   |   | 10          |      | mV/V       |
| $V_{OH}$   | Hysteresis of $V_{OUT}$ @ $I_P = 0$ (after an overload of $1000 \times I_{\Delta N}$ ) |   | 75          | 125  | mV         |
| $V_{OH, Demag}$  | Hysteresis after Degaussing  |   |             | 25   | mV         |
| $V_{OSS}$  | Offsetripple (without external filter)   |   | 70          |      | mV         |
| $V_{OSS}$  | Offsetripple (with 20 kHz-Filter, first order)   |   | 20          |      | mV         |
| $V_{OSS}$  | Offsetripple (with 1 kHz-Filter, first order)  |   | 6           |      | mV         |
|  | Mechanical stress according to M3209/3<br>Settings: 10-2000Hz, 1min/Octave, 2 hours    |   | 1.5         |      | g          |

### Routine Tests:

(Measurement after temperature balance of the samples at room temperature, SC=significant characteristic)

|                                   |                 |  |              |                   |
|-----------------------------------|-----------------|--|--------------|-------------------|
| $V_{OUT} (SC)$                    | (100%) M3011/6: | Output voltage vs. reference                             | 729 ... 751  | mV                |
| $V_O$                             | (100%) M3226:   | Offset voltage ( $V_{OUT} - V_{REF}$ )                   | $\pm 25$     | mV                |
| $V_{OUT} (test current)$          | (100%)          | Output voltage @ $V_{REF} = 0V$                          | $250 \pm 60$ | mV                |
| $U_d$                             | (100%) M3014:   | Test voltage, 1s, Pin 1-4 vs. Pin 5-10                   | 1.8          | kV <sub>RMS</sub> |
| $U_{PDE}$<br>$U_{PD} \cdot 1.875$ | (AQL 1/S4)      | Partial discharge voltage (extinction)<br>*acc. table 24 | 1.5<br>1.875 | kV <sub>RMS</sub> |

### Type Tests:

(Precondition acc. to M3236)

|                                   |        |  |              |                   |
|-----------------------------------|--------|--|--------------|-------------------|
| $\hat{U}_W$                       | M3064: | Impulse test (1.2 $\mu$ s/50 $\mu$ s wave form)<br>Pin 1-4 vs. Pin 5-10, 5 pulses $\rightarrow$ polarity +,<br>5 pulses $\rightarrow$ polarity - | 6            | kV                |
| $\hat{U}_W, prim-prim$            | M3064: | Impulse test (1.2 $\mu$ s/50 $\mu$ s wave form)<br>Pin 1 vs. Pin 2   | 6            | kV                |
| $U_d$                             | M3014: | Test voltage, 60s<br>Pin 1-4 vs. Pin 5-10  | 3.6          | kV <sub>RMS</sub> |
| $U_d, prim-prim$                  | M3014: | Test voltage between primary conductors, 60s<br>Pin 1 vs. Pin 2  | 3.6          | kV <sub>RMS</sub> |
| $U_{PDE}$<br>$U_{PD} \cdot 1.875$ |        | Partial discharge voltage (extinction)<br>*acc. table 24   | 1.5<br>1.875 | kV <sub>RMS</sub> |

\* IEC 61800-5-1:2007

### Other instructions

- Current direction: A positive output voltage appears at point  $V_{OUT}$ , if primary current flows in direction of the arrow.
- Temperature of the primary conductor should not exceed **105°C**.
- Housing and bobbin material UL-listed: Flammability class 94V-0.
- Further standards: UL 508, file E317483, category NMTR2 / NMTR8

Hrg.: R&D-PD NPI D  
editor

Bearb.: DJ  
designer

MC-PM: NSch.  
check

freig.: SB  
released

K-No.: 26621

### 300mA Differential Current Sensor for 5V Supply Voltage

For the electronic measurement of current:  
DC, AC, pulsed ..., with galvanic isolation between the primary and the secondary circuit



Date: 28.06.2021

Customer: Standard type

Customers Part no:

Page 4 of 4

#### Explanation of several terms used in the tables:

$V_{Ot}$  Long term drift of  $V_O$  after 100 temperature cycles in the range  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ .

$t_r$  Response time, measured as a delay time at  $I_{\Delta P} = 0.9 \cdot I_{\Delta N}$  between a rectangular primary current and the output current or voltage.

$t_{ra}$  Reaction time, measured as a delay time at  $I_{\Delta P} = 0.1 \cdot I_{\Delta N}$  between a rectangular primary current and the output current or voltage.

$X_{ges}(I_{\Delta N})$  The sum of all possible errors over the temperature range by measuring a current  $I_{\Delta N}$ :

$$X_{ges}(I_{\Delta N}) = 100 \cdot \left| \frac{V_{OUT}(I_{\Delta N}) - 2.5V}{0.74V} - 1 \right| \%$$

$X$  Permissible measurement error in the final inspection at RT, defined by


$$X = 100 \cdot \left| \frac{V_{OUT}(I_{\Delta N}) - V_{OUT}(0)}{0.74V} - 1 \right| \%$$

$\Delta X_{\theta}$   $\Delta X_{\theta} = X_{\theta_{max}} - X_{\theta_{min}}$

$\epsilon_L$  Linearity fault defined by:  $\epsilon_L = 100 \cdot \left| \frac{I_{\Delta P}}{I_{\Delta N}} - \frac{V_{OUT}(I_{\Delta P}) - V_{OUT}(0)}{V_{OUT}(I_{\Delta N}) - V_{OUT}(0)} \right| \%$

Where  $I_{\Delta P}$  is any input DC current and  $V_{OUT}$  the corresponding output term. ( $V_O = 0$ ).

RT Room temperature

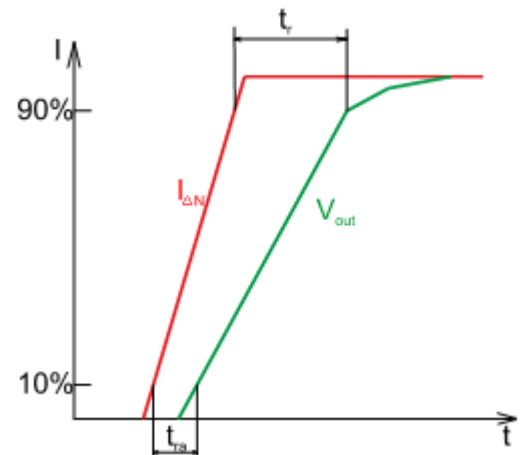

#### Application Information

The external test current can be generated with the use of a resistor  $R$  and a switch  $X$  or something similar (Transistor, Mosfet, etc.). The resistor determine the current at a given voltage and so the output voltage can be calculated.

$$V_{OUT} = V_{REF} \pm \frac{0.74 \cdot \frac{5V}{R + R_{Test}} \cdot 20}{I_{\Delta N}}$$

