

**K-no.:** 24508

**15 A Current Sensor Module for 5V- Supply Voltage**
**Date:** 26.01.2022

 For electronic current measurement:  
 DC, AC, pulsed, mixed ..., with a galvanic  
 isolation between primary circuit  
 (high power) and secondary circuit  
 (electronic circuit)

**Customer:** Standard type

**Customers Part no.:**

Page 1 of 4

**Description**

- Closed loop (compensation)  
Current Sensor with magnetic field probe
- Printed circuit board mounting
- Casing and materials UL-listed

**Characteristics**

- Excellent accuracy
- Very low offset current
- Very low temperature dependency and offset current drift
- Very low hysteresis of offset current
- short response time
- Wide frequency bandwidth
- Compact design
- Reduced offset ripple

**Applications**

Mainly used for stationary operation in industrial applications:

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Switched Mode Power Supplies (SMPS)
- Power Supplies for welding applications
- Uninterruptible Power Supplies (UPS)

**Electrical data – Ratings**

$I_{PN}$	Primary nominal r.m.s. current	15	A
$V_{out}$	Output voltage @ $I_P$	$2.5 \pm (0.625 \cdot I_P / I_{PN})$	V
$V_{out}$	Output voltage @ $I_P=0, T_A=25^\circ C$	$2.5 \pm 0.0071$	V
$V_{Ref}$	Reference voltage	$2.5 \pm 0.005$	V
$K_N$	Turns ratio	1...3 : 2000	

**Accuracy – Dynamic performance data**

		min.	typ.	max.	Unit
$I_{P,max}$	Max. measuring range	±51			
X	Accuracy @ $I_{PN}, T_A=25^\circ C$			0.7	%
$\epsilon_L$	Linearity			0.1	%
$V_{out} -2,5V$	Offset voltage @ $I_P=0, T_A=25^\circ C$			±7.1	mV
$\Delta V_{out} / 2,5V / \Delta T$	Temperatur drift of $V_{out}$ @ $I_P=0, T_A=-40...85^\circ C$		16	32	ppm/K
$t_r$	Response time @ 90% von $I_{PN}$		300		ns
$\Delta t (I_{P,max})$	Delay time at $di/dt = 100 A/\mu s$		200		ns
f	Frequency bandwidth	DC...200			kHz

**General data**

		min.	typ.	max.	Unit
$T_A$	Ambient operating temperature	-40		+85	°C
$T_S$	Ambient storage temperature	-40		+85	°C
m	Mass		12		g
$V_C$	Supply voltage	4.75	5	5.25	V
$I_C$	Current consumption		15		mA

 Constructed and manufactured and tested in accordance with EN 61800-5-1 (Pin 1 - 6 to Pin 7 – 9)  
 Reinforced insulation, Insulation material group 1, Pollution degree 2

$S_{clear}$	Clearance (component without solder pad)	7.5			mm
$S_{creep}$	Creepage (component without solder pad)	8.0			mm
$V_{sys}$	System voltage	overvoltage category 3	RMS	300	V
$V_{work}$	Working voltage	(tabel 7 acc. to EN61800-5-1) overvoltage category 2	RMS	650	V
$U_{PD}$	Rated discharge voltage	peak value		1320	V
	Max. potential difference acc. to UL 508	RMS		600	V <sub>AC</sub>

Date	Name	Issue	Amendment
26.01.2022	NSch.	83	Applicable documents changed on sheet 3. „The color of the plastic material... added. Minor change

Hrsg.: KB-E editor	Bearb.: Le designer	KB-PM: KRe check	freig.: SB released
-----------------------	------------------------	---------------------	------------------------

K-no.: 24508

**15 A Current Sensor Module for 5V- Supply Voltage**

Date: 26.01.2022

For electronic current measurement:  
DC, AC, pulsed, mixed ..., with a galvanic  
isolation between primary circuit  
(high power) and secondary circuit  
(electronic circuit)

Customer: Standard type


Customers Part no.:

Page 2 of 4

**Mechanical outline (mm):**


General tolerances DIN ISO 2768-c

Tolerances grid distance ±0,2mm



DC = Date Code  
F = Factory


Connections:  
1...6: Ø 1 mm  
7...9: 0,46\*0,46 mm

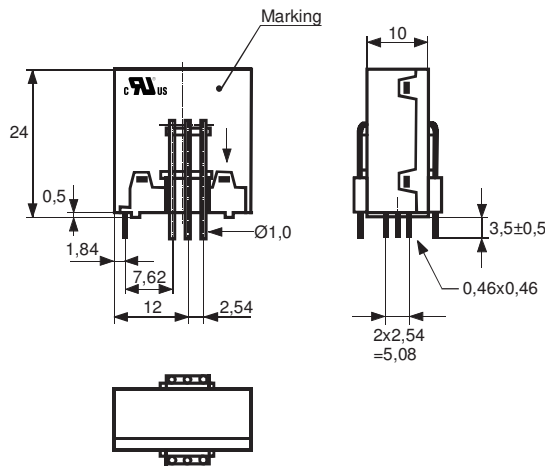

Marking:

**VAC** UL-sign  
4646-X652  
F DC

**Schematic diagram**

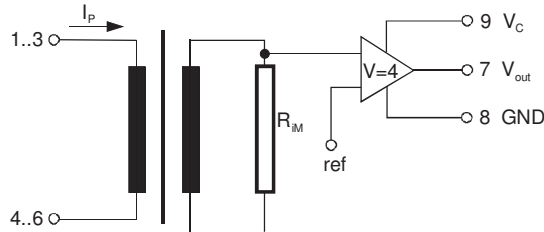

**Possibilities of wiring** (@ T<sub>A</sub> = 85°C)

primary windings	primary current RMS	primary current maximal	output voltage RMS	turns ratio	primary resistance	wiring
N <sub>P</sub>	I <sub>P</sub> [A]	I <sub>P,max</sub> [A]	V <sub>out</sub> (I <sub>P</sub> ) [V]	K <sub>N</sub>	R <sub>P</sub> [mΩ]	
1	15	±51	2.5±0.625	1:2000	0.33	
2	7,5	±25	2.5±0.625	2:2000	1.5	
3	5	±17	2.5±0.625	3:2000	3	

Hrsg.: KB-E  
editor

Bearb: Le  
designer

KB-PM: KRe  
check

freig.: SB  
released

**K-no.:** 24508

**15 A Current Sensor Module for 5V- Supply Voltage**
**Date:** 26.01.2022

 For electronic current measurement:  
 DC, AC, pulsed, mixed ..., with a galvanic  
 isolation between primary circuit  
 (high power) and secondary circuit  
 (electronic circuit)

**Customer:** Standard type

**Customers Part no.:**
**Page** 3 **of** 4

**Electrical Data**

		min.	typ.	max.	Unit
$V_{Ctot}$	Maximum supply voltage (without function)			7	V
$I_C$	Supply Current with primary current		15mA + $I_p \cdot K_N + V_{out}/R_L$		mA
$I_{out,SC}$	Short circuit output current		$\pm 20$		mA
$R_P$	Resistance / primary winding @ $T_A=25^\circ C$		1		m $\Omega$
$R_S$	Secondary coil resistance @ $T_A=85^\circ C$			67	$\Omega$
$R_{i,(V_{out})}$	Output resistance of $V_{out}$			1	$\Omega$
$R_L$	External recommended resistance of $V_{out}$	1			k $\Omega$
$C_L$	External recommended capacitance of $V_{out}$			500	pF
$\Delta X_T/\Delta T$	Temperature drift of X @ $T_A = -40 \dots +85^\circ C$			40	ppm/K
$\Delta V_0 = \Delta(V_{out} - 2.5V)$	Sum of any offset drift including:		6	12	mV
$V_{0t}$	Long term drift of $V_0$		2		mV
$V_{0T}$	Temperature drift von $V_0$ @ $T_A = -40 \dots +85^\circ C$		5		mV
$V_{0H}$	Hysteresis of $V_{out}$ @ $I_P=0$ (after an overload of $10 \times I_{PN}$ )		3		mV
$\Delta V_0/\Delta V_C$	Supply voltage rejection ratio			1	mV/V
$V_{OSS}$	Offsetripple (with 1 MHz- filter first order)			70	mV
$V_{OSS}$	Offsetripple (with 100 kHz- filter first order)		5.5	11	mV
$V_{OSS}$	Offsetripple (with 20 kHz- filter first order)		1.5	3	mV
$C_k$	Maximum possible coupling capacity (primary – secondary)		5	10	pF
	Mechanical stress according to M3209/3 Settings: 10 – 2000 Hz, 1 min/Octave, 2 hours			30g	

**Inspection** (Measurement after temperature balance of the samples at room temperature)

$V_{out} (I_P=I_{PN})$	(V)	M3011/6:	Output voltage vs. internal reference ( $I_P=15A$ , 40-80Hz)	625 $\pm$ 0.7%	mV
$V_{out}-2.5V (I_P=0)$	(V)	M3226:	Offset voltage	$\pm 7.1$	mV
$V_d$	(V)	M3014:	Test voltage, rms, 1 s pin 1 – 6 vs. pin 7 – 9	1.5	kV
$V_e$	(AQL 1/S4)		Partial discharge voltage acc.M3024 (RMS) with $V_{vor}$ (RMS)	1400 1750	V V

**Type Testing** (Pin 1 - 6 to Pin 7 - 9)

Designed according standard EN 50178 with insulation material group 1

$V_W$			HV transient test according (to M3064) (1,2 $\mu s$ / 50 $\mu s$ -wave form)	8	kV	
$V_d$			Testing voltage to M3014	(5 s)	3	kV
$V_e$			Partial discharge voltage acc.M3024 (RMS) with $V_{vor}$ (RMS)	1400 1750	V V	

**Applicable documents**

Current direction: A positive output current appears at point  $I_S$ , by primary current in direction of the arrow.  
 Enclosures according to IEC529: IP50.  
 Further standards UL 508 ; file E317483, category NMTR2 / NMTR8  
 Temperature of the primary conductor should not exceed 110°C.  
 The color of the plastic material is not specified and the current sensor can be supplied in different colors  
 (e.g. brown, black, white, natural). This has no effect on the specifications or UL approval."

**Hrsg.:** KB-E  
 editor

**Bearb.:** Le  
 designer

**KB-PM:** KRe  
 check

**freig.:** SB  
 released

K-no.: 24508

**15 A Current Sensor Module for 5V- Supply Voltage**

Date: 26.01.2022

For electronic current measurement:  
DC, AC, pulsed, mixed ..., with a galvanic  
isolation between primary circuit  
(high power) and secondary circuit  
(electronic circuit)

Customer: Standard type

Customers Part no.:

Page 4 of 4

**Explanation of several of the terms used in the tablets (in alphabetical order)**

$t_r$ : Response time (describe the dynamic performance for the specified measurement range), measured as delay time at  $I_P = 0,9 \cdot I_{PN}$  between a rectangular current and the output voltage  $V_{out}(I_p)$

$\Delta t(I_{Pmax})$ : Delay time (describe the dynamic performance for the rapid current pulse rate e.g short circuit current) measured between  $I_{Pmax}$  and the output voltage  $V_{out}(I_{Pmax})$  with a primary current rise of  $di_P/dt \geq 100 \text{ A}/\mu\text{s}$ .

$U_{PD}$  Rated discharge voltage (recurring peak voltage separated by the insulation) proved with a sinusoidal voltage  $V_e$   
 $U_{PD} = \sqrt{2} \cdot V_e / 1,5$

$V_{vor}$  Defined voltage is the RMS value of a sinusoidal voltage with peak value of  $1,875 \cdot U_{PD}$  required for partial discharge test in IEC 61800-5-1  
 $V_{vor} = 1,875 \cdot U_{PD} / \sqrt{2}$

$V_{sys}$  System voltage RMS value of rated voltage according to IEC 61800-5-1

$V_{work}$  Working voltage voltage according to IEC 61800-5-1 which occurs by design in a circuit or across insulation

$V_o$ : Offset voltage between  $V_{out}$  and the rated reference voltage of  $V_{ref} = 2,5V$ .  
 $V_o = V_{out}(0) - 2,5V$

$V_{0H}$ : Zero variation of  $V_o$  after overloading with a DC of tenfold the rated value

$V_{0t}$ : Long term drift of  $V_o$  after 100 temperature cycles in the range -40 bis 85 °C.

X: Permissible measurement error in the final inspection at RT, defined by

$$X = 100 \cdot \left| \frac{V_{out}(I_{PN}) - V_{out}(0)}{0,625V} - 1 \right| \%$$

$X_{ges}(I_{PN})$ : Permissible measurement error including any drifts over the temperature range by the current measurement  $I_{PN}$

$$X_{ges} = 100 \cdot \left| \frac{V_{out}(I_{PN}) - 2,5V}{0,625V} - 1 \right| \% \quad \text{or} \quad X_{ges} = 100 \cdot \left| \frac{V_{out}(I_{PN}) - V_{ref}}{0,625V} - 1 \right| \%$$

$\epsilon_L$ : Linearity fault defined by  $\epsilon_L = 100 \cdot \left| \frac{I_P}{I_{PN}} - \frac{V_{out}(I_P) - V_{out}(0)}{V_{out}(I_{PN}) - V_{out}(0)} \right| \%$

Hrsg.: KB-E  
editor

Bearb: Le  
designer

KB-PM: KRe  
check

freig.: SB  
released