

K-No.: 26691/3

500A Current Sensor

For the electronic measurement of currents:
DC, AC, pulsed, mixed with a galvanic Isolation
between the primary circuit (high power) and the
secondary circuit (electronic circuit)



Date: 22.06.2020

Customer: Standard type

Customers Part no:

Page 1 of 4

Description

- Closed loop (compensation) Current Sensor with magnetic probe
- Printed circuit board mounting
- Casing and materials UL-listed

Characteristics

- excellent accuracy
- very low offset current
- very low temperature dependency and offset current drift
- very low hysteresis of offset current
- short response time
- wide frequency bandwidth
- compact design
- reduced offset ripple

Applications

Mainly used for stationary operation in industrial applications:

- AC variable speed drives and servo motor drives
- static converters for DC motor drives
- Battery supplied applications
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications
- Uninterruptable Power Supplies (UPS)

Electrical data – Ratings

I_{PN}	Primary nominal RMS current	500	A
R_M	Measuring resistance	0 ... 200	Ω
I_{SN}	Secondary nominal RMS current	250	mA
K_N	Transformation ratio	(1) : 2000	

Accuracy – Dynamic performance data

		min.	typ.	max.	Unit
$I_{P,max}$	Max. measuring range @ $V_C = \pm 15V$, $R_M < 10\Omega$ ($t_{max} = 10sec$)	700			A
X	Accuracy @ I_{PN} , $\vartheta_A = 25^\circ C$			0.5	%
ϵ_L	Linearity			0.1	%
I_o	Offset current @ $I_P = 0A$, $\vartheta_A = 25^\circ C$			0.2	mA
t_r	Response time		<1		μs
t_{ra}	Reaction time		<1		μs
f	Frequency bandwidth	DC...50			kHz

General data

ϑ_A	Ambient operation temperature	-40		85	$^\circ C$
ϑ_S	Ambient storage temperature (acc. M3101)	-40		85	$^\circ C$
m	Mass		174		g
V_C	Supply voltage	± 14.25	± 15	± 15.75	V
I_C	Supply current at $I_P = 0A$ and RT		± 23		mA

Constructed and manufactured and tested in accordance with IEC 61800-5-1:2007 (Pin 1-4 to hole)
Insulation material group 1, Pollution degree 2, Overvoltage category III

S_{clear}	Clearance	8			mm
S_{creep}	Creepage	12			mm
$U_{sys, re}$	System voltage (reinforced insulation)			600	V_{RMS}
$U_{work, re}$	Working voltage (reinforced insulation)			1000	V_{RMS}
U_{PD}	Rated discharge voltage			1414	V_{PEAK}
$U_{sys, basic}$	System voltage (basic insulation)			1000	V_{RMS}
$U_{work, basic}$	Working voltage (basic insulation)			2400	V_{RMS}
	max. Potential Difference acc. to UL 508			600	V_{RMS}

Date	Name	Issue	Amendment
		81	

Editor: R&D-PD NPI D Designer: DJ MC-PM: NSch. Released: SB

K-No.: 26691/3

500A Current Sensor

For the electronic measurement of currents:
DC, AC, pulsed, mixed with a galvanic Isolation
between the primary circuit (high power) and the
secondary circuit (electronic circuit)



Date: 22.06.2020

Customer: Standard type

Customers Part no:

Page 2 of 4

Mechanical outline (mm):

General tolerances DIN ISO 2768-c

Connections:




Pins 1-4: 0.64mm x 0.64mm

Marking:


UL-sign 4648-X053 F DC

F: Factory
DC: Date Code

Date Code Format: [YYWW]

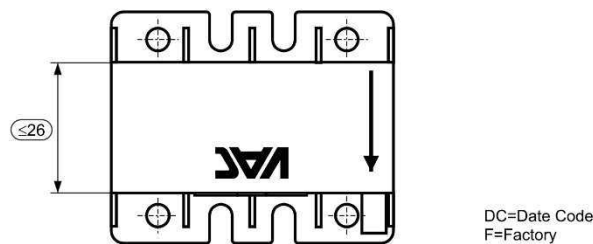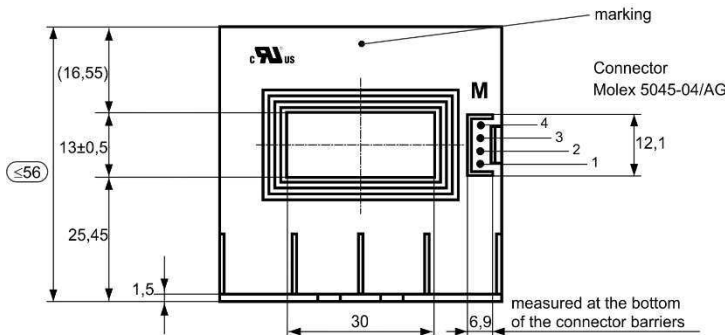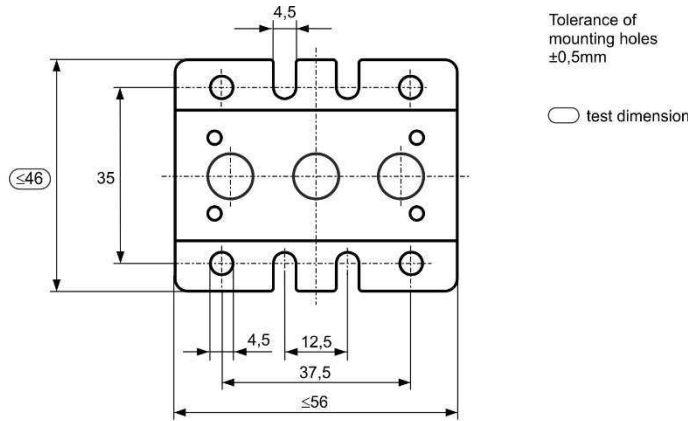

Schematic diagram:

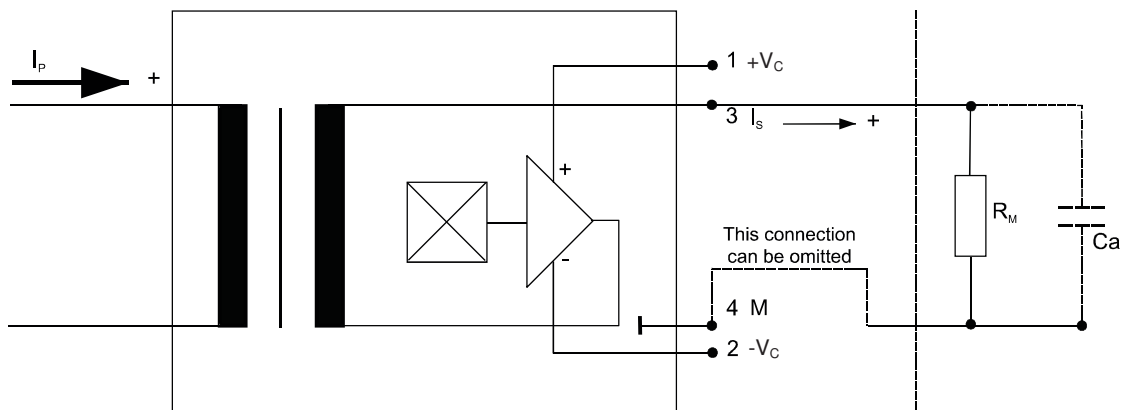

Editor: R&D-PD NPI D

Designer: DJ

MC-PM: NSch.

Released: SB

K-No.: 26691/3

500A Current Sensor

For the electronic measurement of currents:
DC, AC, pulsed, mixed with a galvanic Isolation
between the primary circuit (high power) and the
secondary circuit (electronic circuit)



Date: 22.06.2020

Customer: Standard type

Customers Part no:

Page 3 of 4

Electrical data: (investigate by a type checking)		min.	typ.	max.	Unit
$V_{C,tot}$	maximum supply voltage (without function) $\pm 15.75V$ to $\pm 18V$: for 1s per hour			± 18	V
R_S	Secondary coil resistance @ $\vartheta_A = 85^\circ C$			30	Ω
X_{TI}	Temperature drift of X @ $\vartheta_A = -40^\circ C \dots 85^\circ C$			0.1	%
I_{ot}	Long term drift of I_o		0.05		mA
I_{oT}	Offset current temperature drift I_o @ $\vartheta_A = -40^\circ C \dots 85^\circ C$		0.05		mA
I_{oH}	Hysteresis current @ $I_P = 0A$ (caused by $I_P = 3 \times I_{PN}$)		0.1		mA
$\Delta I_o / \Delta V_C$	Supply voltage rejection ratio			0.01	mA/V
i_{oss}	Offsetripple* (with 1 MHz-Filter, first order)		0.4	0.6	mA _{pp}
i_{oss}	Offsetripple* (with 100 kHz-Filter, first order)		0.06		mA _{pp}
i_{oss}	Offsetripple* (with 20 kHz-Filter, first order)		0.02		mA _{pp}
C_k	Maximum possible coupling capacity (primary - secondary)		15		pF
	Mechanical stress according to M3209/3 Settings: 10-2000Hz, 1min/oct, 2 hours		2		g

Routine Tests:

(Measurement after temperature balance of the samples at room temperature, SC=significant characteristic)

K_N (SC)	(100%) M3011/6	Transformation ratio		1990 ... 2010	
I_o	(100%) M3226	Offset current		0.2	mA
U_d	(100%) M3014	Test voltage, 1s		1.8	kV _{RMS}
U_{PDE} $U_{PD}^*1.875$	(AQL 1/S4) M3024	Partial discharge voltage (extinction)		1.5 1.875	kV _{RMS}

Type Tests:

(Precondition acc. to M3236)

\hat{U}_W	M3064	HV transient test (1.2 μ s / 50 μ s) 5 pules -> polarity +, 5 pulses -> polarity -		8	kV
U_d	M3014	Test voltage, 5s		3.6	kV _{RMS}
U_{PDE} $U_{PD}^*1.875$	M3024	Partial discharge voltage (extinction)		1.5 1.875	kV _{RMS}

K-No.: 26691/3

500A Current Sensor

For the electronic measurement of currents:
DC, AC, pulsed, mixed with a galvanic Isolation
between the primary circuit (high power) and the
secondary circuit (electronic circuit)





Date: 22.06.2020

Customer: Standard type

Customers Part no:

Page 4 of 4

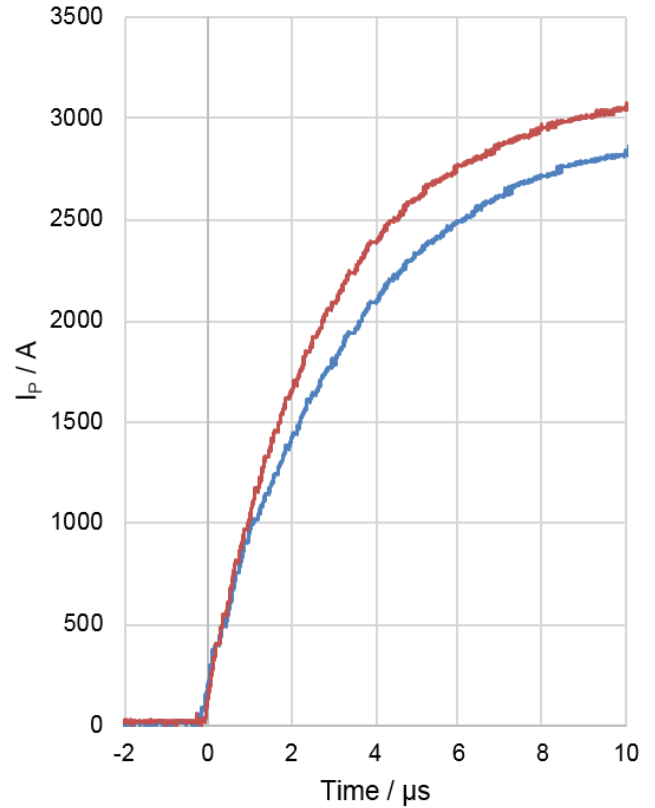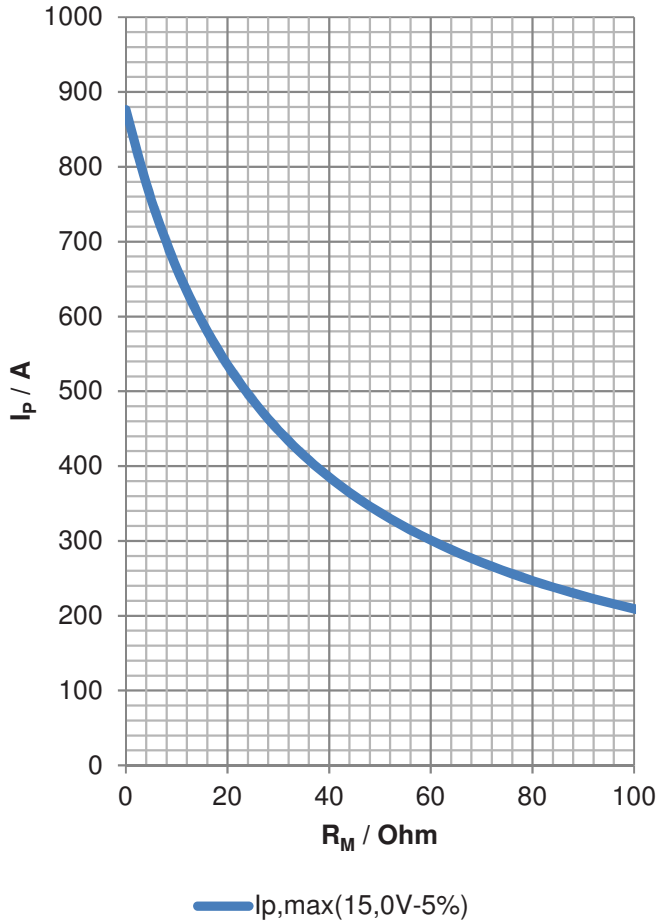

Fast increasing currents (higher than the specified $I_{p,max}$), e.g. in case of a short circuit, can be transmitted because the currents are transformed directly and be limited by diodes only.

*Possible way to reduce the Offset ripple by a Low-Pass-Filter

The offset ripple can be reduced by an external low pass. Simplest solution is a passive low pass filter of 1st order with cutoff frequency:

$$f_g = \frac{1}{2 * \pi * R_M * C_a}$$

In this case the response time is enlarged:

$$t'_r \leq t_r + 2,5 * R_M * C_a$$

Other instructions

- Current direction: A positive output current appears at point I_s , if primary current flows in direction of the arrow.
- Temperature of the primary conductor should not exceed 105°C.
- Housing and bobbin material UL-listed: Flammability class 94V-0.
- Further standards: UL508, UL-file: E317483, category NMTR2 / NMTR8
- Sensor is potted with resin.

Editor: R&D-PD NPI D

Designer: DJ

MC-PM: NSch.

Released: SB