

**NEW!**

# VITROPERM 550 HF

## NEW NANOCRYSTALLINE CORES OFFERING VOLUME, WEIGHT & COST OPTIMIZED HF-DESIGNS



Tape wound cores made of our new VITROPERM® 550 HF offer improved attenuation at high frequencies (HF,  $f > 100$  kHz) in comparison to our standard VITROPERM 500 F cores and typical EMI ferrites. These cores enable high RFI-noise suppression in innovative filter designs with smaller volume and/or higher performance for future applications.

### TARGET APPLICATIONS

- Common mode chokes, power-, drive- and signal-transformers for SMPS (Switched Mode Power Supplies), wind/solar inverters and variable frequency drives

### MATERIAL DATA OF VITROPERM 550 HF (TYPICAL VALUES)

Saturation flux density	1.21 T (room temperature)
Coercivity (static)	$< 2$ A/m
Saturation magnetostriction	$\sim 1 \times 10^{-7}$
Specific electrical resistivity	$115 \mu\Omega\text{cm}$
Curie temperature	$> 600^\circ\text{C}$
Upper operational temperature	plastic case: $130^\circ\text{C}^*$ core mat.: $155^\circ\text{C}$ $180^\circ\text{C}$ (lim. time)
Typical permeability $\mu$	$\sim 20,000 - 100,000$ (10 kHz)

\* Plastic cases suitable for upper continuous application temperatures of  $155^\circ\text{C}$  are available on request.

- Cores, common mode chokes and power transformers for powertrain and battery charging (wallboxes, on-board chargers, charging piles) for electric vehicles



Common mode chokes using VITROPERM 550 HF cores offer the following features:

- Up to 60 % size/weight reduction compared to VITROPERM 500 F (VP) solutions and even more compared to ferrites
- Broadband insertion loss characteristic as known from VP 500 F  
In case of transformers, significantly reduced core losses above 50 kHz can be achieved.

### NEW VITROPERM 550 HF CORES

Part number	$A_L$ [ $\mu\text{H}$ ] @ 100 kHz	$I_{cm}$ [A] @ 10 (100) kHz		
<b>T60004-</b>	VP 500F	VP 550HF	VP 500F	VP 550HF
L2025-V344 25x16x10 mm <sup>3</sup>	15.5	24	0.3 (0.65)	0.3 (0.6)
L2040-V345 40x25x15 mm <sup>3</sup>	23.1	36.1	0.5 (1.0)	0.5 (0.9)
L2102-V346 102x76x25 mm <sup>3</sup>	23.3	36.1	1.5 (3.3)	1.5 (2.8)

### TYPICAL CHARACTERISTICS: VITROPERM 550 HF – VITROPERM 500 F

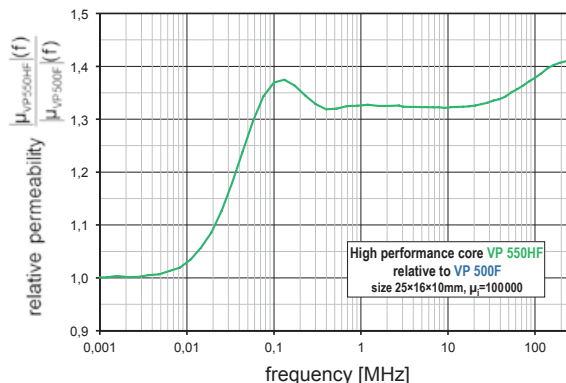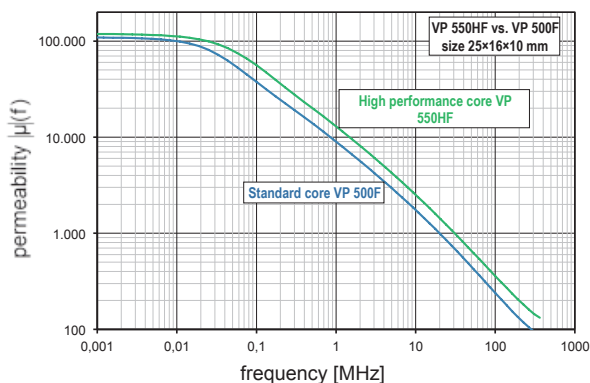

ADVANCED MATERIALS – THE KEY TO PROGRESS

**VAC**<sup>®</sup>  
VACUUMSCHMELZE

**VAC MAGNETICS LLC**

2935 Dolphin Drive  
Suite 103  
Elizabethtown, KY 42701  
Phone +1 270 769 1333  
Fax +1 270 769 3118  
info-usa@vacmagnetics.com

**VACUUMSCHMELZE CHINA MAGNETICS**

Shanghai Sales Office  
Room 06, 19F  
Zhongrong Hengrui International Plaza  
620 Zhangyang Road, Pudong District  
Shanghai, PRC 200122  
Phone +86 21 58 31 98 37  
Fax +86 21 58 31 99 37  
vac\_china@vacuumschmelze.com

**VACUUMSCHMELZE GMBH & CO. KG**

Grüner Weg 37  
D 63450 Hanau / Germany  
Phone +49 6181 38 0  
Fax +49 6181 38 2645  
info@vacuumschmelze.com  
www.vacuumschmelze.com

**VACUUMSCHMELZE SINGAPORE PTE LTD**

60, Paya Lebar Road  
Paya Lebar Square  
#06-16  
Singapore 409051  
Phone +65 6585 1243  
VACSingapore@vacuumschmelze.com

**OMG CHEMICALS & MAGNETICS PVT. LTD.**

**VACUUMSCHMELZE INDIA OFFICE**  
A-101 & 102, Kailas Business Park  
Veer Savarkar Road  
Park Site  
Vikhroli West  
Mumbai-400079, Maharashtra  
Phone +91 22 2518 0017 / 0018  
vac\_india@vacuumschmelze.com

Published by VACUUMSCHMELZE GmbH & Co. KG, Hanau  
© VACUUMSCHMELZE GmbH & Co. KG 2019. All rights reserved.

® is a Registered Trademark of VACUUMSCHMELZE GmbH & Co. KG



**ADVANCED MATERIALS – THE KEY TO PROGRESS**